MegaCPK - Standardised Process Pump to EN 22858 / ISO 2858 / ISO 5199

Applications :

For handling aggressive organic and inorganic fluids in


- Chemical industry
- Petrochemical industry
- Process engineering
- Sugar industry
- Biodiesel, bioethanol
- Fire-fighting systems / fire-fighting water

- Seawater desalination /
- reverse osmosis
- Condensate
- Hot water
- Brine
- Steel industry
- Heat transfer media
- Cleaning agents





MegaCPK - Standardised Process Pump to EN 22858 / ISO 2858 / ISO 5199

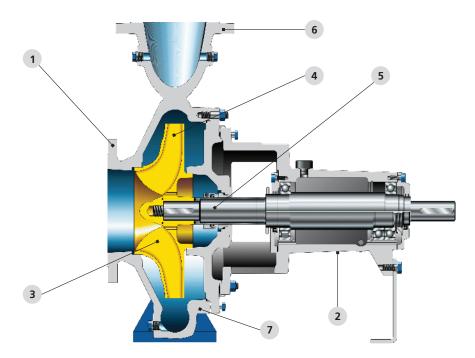

1 In compliance with relevant standards Dimensions to ISO 2858 and design ISO 5199

2 High reliability and lower operating costs Reduced energy consumption, optimised spare parts

concept and hard-wearing, service-friendly design.

3 Energy efficiency

Hydraulic characteristics optimised for excellent efficiency and NPSH, ensuring energy-efficient and environmentally friendly use of resources.

4 Lower investment costs

Duty points required can be achieved with smaller pump sizes.

5 Large range of variants for all applications All shaft seal types possible including gland packings,

single or double mechanical seals and cartridge seals.

6 The right size for each application

With at least 8 additional pump sizes and 11 more than required as per DIN ISO 2858.

7 Easy to service

Back pull-out design and smaller spare parts stocks.

Up to 1.160 m³/h (50 Hz)
Up to 1.400 m³/h (60 Hz)
Up to 162 m (50 Hz)
Up to 233 m (60 Hz)
-30°C to +300°C
Up to 25 ba



Material options Cast iron A48CL35 Cast steel A216GrWCB Stainless steel A743GrCF8M Duplex steel A995GrCD4MCuN

Special materials

2720.022-EN